



Next Generation R-Series Oil-Flooded Rotary Screw Air Compressors

200-250 kW (250-350 hp)



Ingersoll Rand works to keep you ahead of your competition with Next Generation R-Series air compressors that boost productivity, lower operating expenses and extend equipment life.

Next Generation R-Series air compressors. The intelligence you need—to win.

World-class performance

- **State-of-the-art airend** delivers as much as 16% improved efficiency and 21% greater airflow capacity; two stage airend available for even greater efficiency and reduced bearing load to extend life
- **PAC™ protection, V-Shield™ technology and free-floating cooling system** help maximize uptime
- **Xe-Series controller with intuitive, high-resolution color display** offers remote access with any common, current web browser
- **NEMA Premium® efficiency motor** delivers significant energy savings, and the optional variable speed drive (VSD) further decreases energy demands
- **Air-cooled and water-cooled options** to best match your operating environment
- **Harsh environment options** for high and low ambient temperature as well as outdoor operation

Standard Features include:	Optional Features include:
Premium TEFC motor with space heater and RTD	Outdoor modification/rain protection
Star-delta reduced voltage starter	Low ambient temperature protection to -10°F (-23°C)
Noise attenuation enclosure with hinged, removable doors for easy service access	High ambient rating up to 131°F (55°C)
Stainless steel and PTFE coolant hoses with repeatable leak free connections	Premium high dust filtration
Free-floating cooling system optimized for efficiency and serviceability	Fluid containment system
PAC™ Protection adjusts operating parameters in response to compressor operation	Ultra FG lubricant
Package rating for operation up to 115°F (46°C)	Automatic power outage restart option (PORO)
Package pre-filter	Solid state reduced voltage starter
Control panel with enhanced environmental protection against dust and liquids	Flow control modulation control
Long-life consumables and 16,000-hour life Ultra EL lubricant	Phase monitor protection


i Ingersoll Rand – 60 Hz Performance					
Model	Max. Pressure psig	Nominal Power hp	Capacity (FAD)* cfm	Dimensions (Length x Width x Height) in	Weight lb
185i	110	250	1,367	148 x 85 x 99	13,834
	125		1,310		
	145		1,211		
220i	110	300	1,642	148 x 85 x 99	13,834
	125		1,579		
	145		1,409		
260i	110	350	1,702	148 x 85 x 99	13,834
	125		1,639		
	145		1,519		

ie Ingersoll Rand – 60 Hz Performance					
185ie	110	250	1,444	170 x 85 x 99	18,378
	125		1,388		
	145		1,271		
	200		1,063		
220ie	110	300	1,695	170 x 85 x 99	18,378
	125		1,582		
	145		1,483		
	200		1,275		
260ie	110	350	1,840	170 x 85 x 99	18,378
	125		1,780		
	145		1,621		
	200		1,398		

n Ingersoll Rand – 60 Hz Performance					
200n	100-145	200	593-1,460	148 x 85 x 99	13,834
250n	100-145	250	593-1,751		

ne Ingersoll Rand – 60 Hz Performance					
200ne	100-145	200	660-1,546	170 x 85 x 99	18,378
250ne	100-145	250	660-1,890		

*FAD (Free Air Delivery) is full package performance including all losses, tested per ISO 1217:2009 Annex C

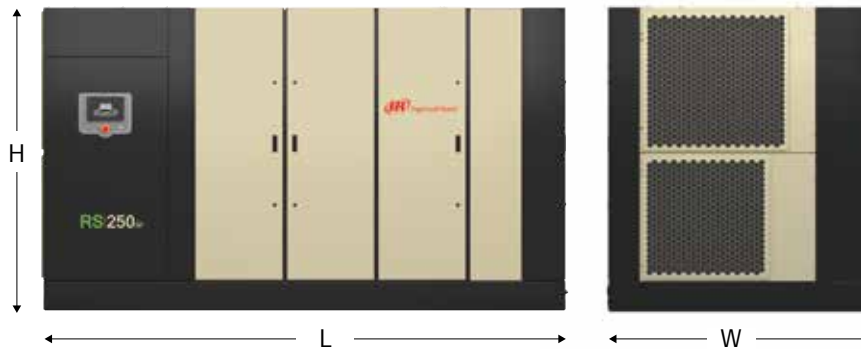

IngersollRandProducts.com

Ingersoll Rand (NYSE:IR) advances the quality of life by creating comfortable, sustainable and efficient environments. Our people and our family of brands—including Club Car®, Ingersoll Rand®, Thermo King® and Trane®—work together to enhance the quality and comfort of air in homes and buildings; transport and protect food and perishables; and increase industrial productivity and efficiency. We are a \$13 billion global business committed to a world of sustainable progress and enduring results.



Ingersoll Rand, IR, the IR logo, PAC software and V-Shield are trademarks of Ingersoll Rand, its subsidiaries and/or affiliates. All other trademarks are the property of their respective owners. Ingersoll Rand compressors are not designed, intended or approved for breathing air applications. Ingersoll Rand does not approve specialized equipment for breathing air applications and assumes no responsibility or liability for compressors used for breathing air service. Nothing contained on these pages is intended to extend any warranty or representation, expressed or implied, regarding the product described herein. Any such warranties or other terms and conditions of sale of products shall be in accordance with Ingersoll Rand's standard terms and conditions of sale for such products, which are available upon request. Product improvement is a continuing goal at Ingersoll Rand. Any designs, diagrams, pictures, photographs and specifications contained within this document are for representative purposes only and may include optional scope and/or functionality and are subject to change without notice or obligation.