



Centrifugal Oil Filters

Our oil filters are made with 2 layers a micro-fiberglass layer along with a diffuser/support layer to assure that the filter captures all particulates effectively. This is the same technology used in the aerospace industry for the oil in hydraulic control systems and turbines. We recommend changing the lubricant after 16,000 hours or 2 years of operation, to prolong component life and help guarantee reliable compressor operation.

Features


Our centrifugal oil filter use micro-fiberglass, the same highly effective material used in the aerospace industry.

OPTIMIZE YOUR EQUIPMENT PERFORMANCE


An oil filter removes contaminants (debris, dirt, etc.) from the compressors lubricating oil. The lubricant is what sustains the pinion when it is working at its maximum speed, so it must be as clean as possible to avoid any varnish formation and damage to the pinion and bearings. Most oil filters look the same, enclosed in a metal cover. However, you cannot see the most important element from the outside, the filtration media. To save money, some manufacturers use cellulose media. Cellulose media is not adequate to be used with hydrostatically squeeze film viscous dampened bearings.



Centrifugal Filter Construction

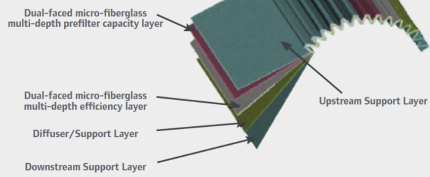

Parts & Accessories



ECO-SPIN Inertial Spin Filter



ECO-FILTER Intake Filtration System



MSG TURBO-AIR Centrifugal Compressor Replacement Parts



Ingersoll Rand (NYSE:IR) advances the quality of life by creating comfortable, sustainable and efficient environments. Our people and our family of brands—including Club Car®, Ingersoll Rand®, Thermo King® and Trane®—work together to enhance the quality and comfort of air in homes and buildings; transport and protect food and perishables; and increase industrial productivity and efficiency. We are a \$14 billion global business committed to a world of sustainable progress and enduring results. For more information, visit www.ingersollrand.com.