

# GHH RAND®


## CF128G – Oil-Injected Screw Compressor Airend

The CF128G is a single stage oil-injected screw compressor airend with an integrated gear drive, which can be used for general industrial applications.

### Operating Range

Parameters	Units	Min	Max
Power	kW / hp	19.4 / 26	198/265.7
Discharge Pressure, abs.	bar / psi	6 / 87	16 / 232
Volume Flow	m <sup>3</sup> /min / cfm	4.1 / 144	20.8/735.4

Medium: Air, Inlet temp. 20°C/68°F, Discharge temp. 80°C/176°F, Inlet pressure 1 bar(a)/14.5 psi(a), RH: 60%

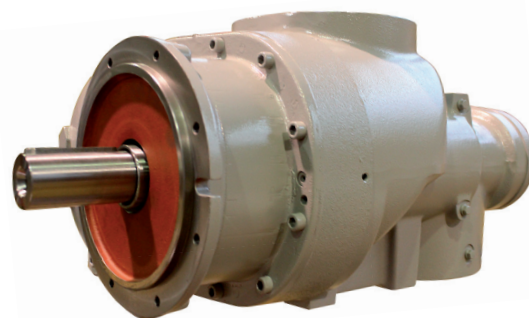

### Technical Data

Parameters	Units	Data
Length	mm	801
Width	mm	433
Height	mm	370
Weight	kg	280
Inlet DN	mm	150
Outlet DN	mm	125

### GHH RAND recommends:



- Maximize life and efficiency with Primecool or Primecool Plus (food grade)
- Ask your sales rep. for details

**GHH RAND Schraubenkompressoren GmbH**  
Max-Planck-Ring 27 • 46049 Oberhausen • Germany  
Phone +49 (0) 208 9994-0 • Fax +49 (0) 208 9994-111  
industrial-sales@ghhrand.com • www.ghhrand.com